



FARSH-STUDIO
Floored Forever



Chateau Herringbone



Range





Baron Oak

Plank Size: 470×95×8 mm

Qty per Box: 20.19

Plank per Box: 42

Specification: Black HDF | AC5 | V-Groove |

EIR Finish | Wax Quoted |

100 hrs Waterproof



Bartik Oak

Plank Size: 470×95×8 mm

Qty per Box: 20.19

Plank per Box: 42

Specification: Black HDF | AC5 | V-Groove |

EIR Finish | Wax Quoted |

100 hrs Waterproof



Elburg Oak

Plank Size: 470×95×8 mm

Qty per Box: 20.19

Plank per Box: 42

Specification: Black HDF | AC5 | V-Groove |

EIR Finish | Wax Quoted |

100 hrs Waterproof



Golden Oak

Plank Size: 470×95×8 mm

Qty per Box: 20.19

Plank per Box: 42

Specification: Black HDF | AC5 | V-Groove |

EIR Finish | Wax Quoted |

100 hrs Waterproof



Gyant Oak

Plank Size: 470×95×8 mm

Qty per Box: 20.19

Plank per Box: 42

Specification: Black HDF | AC5 | V-Groove |

EIR Finish | Wax Quoted |

100 hrs Waterproof

Technical Features & Performance



4inLook texture for one-stop beauty



Large install without transition

Dimensional stability makes it possible to be installed over 6,000 sf without transition.



SurfaceGuard provides lifetime protection

Liquid overlay adds an extra layer of resistance to wear, scratch and stain resistance than the industry-leading rigid coatings. SurfaceGuard® adopts ultimate strong surfaces with the abrasion rating of AC3, AC4 and AC5.



A breakthrough of stability

With an innovative black HDF core whose swelling rate is lower than 10% and density is higher than 900kgs/m³, LoSwell product enjoys much higher resistance against water and is 60% more stable than standard laminate flooring.



Painted Bevel for real wood looking



SurfaceGuard provides lifetime protection



Other Features



LIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



STYLISH



SIMPLICLEAN



GEOTHERMAL



SCRATCH-RESISTANT



FIRE-RESISTANT



GRADE : AC 5

Product Structure

Liquid Overlay

Surface wear layer protects against scratches, scuffs and stains for a long-lasting new floor look and performance. It can be appropriate for all residential / light commercial areas

Decor Paper


Designer-inspired visuals create a true-to-nature appearance.

Highly Water-resistant HDF Core

Prevents telegraphing of minor subfloor imperfections
Impact resistance and more substantial feel
Optimum in sound absorption.
Superior Dimensional stability with exclusive composition

Balance Layer

Providing balance on dimensional stability and moisture-resistant.

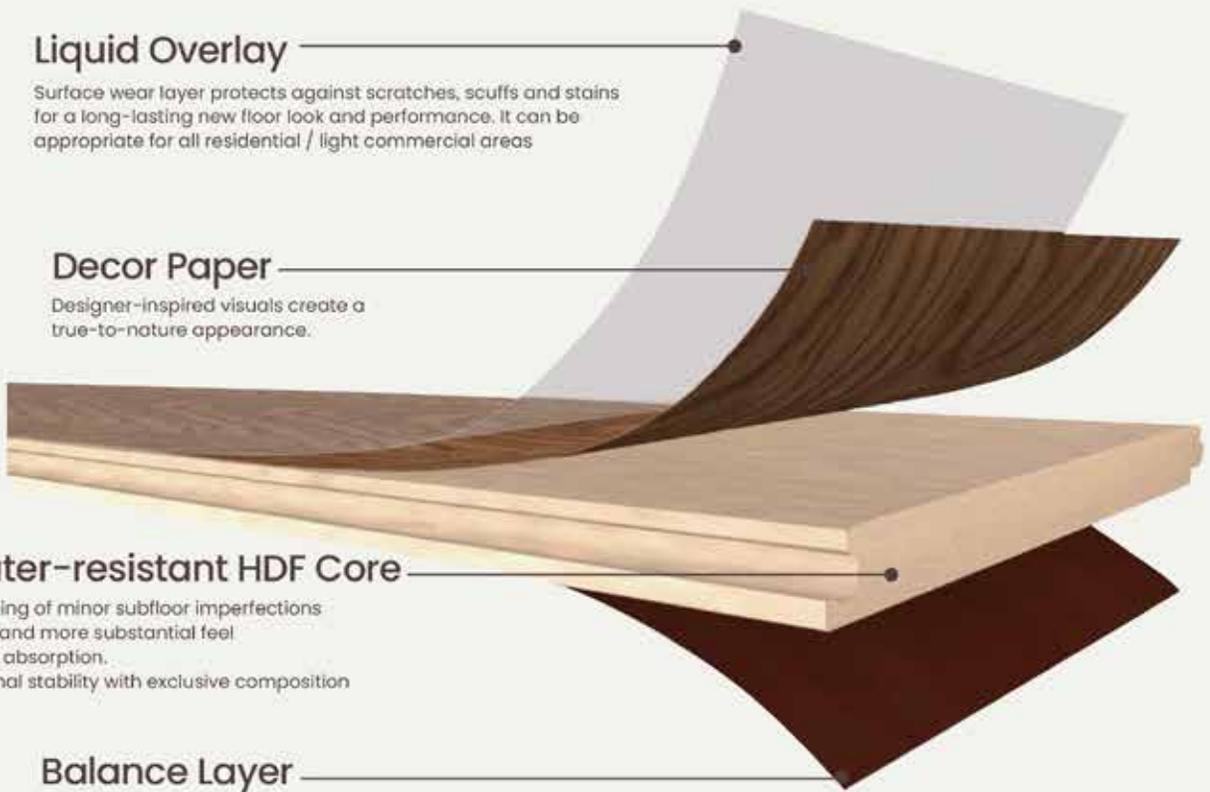

Highly Water-resistant



Super anti-scratch
to a worry-free life daily



Incredible resistibility
to impacts



Wet Mops and
sanitizers friendly



Utter resistance to the
daily abuse of liquid

Highly Water-resistant

Description	Standard	Symbol	Requirements	Result
Thickness swelling	EN 13329		$\leq 18\%$	9.1%
Dimensional variations after changes in relative humidity	EN 13329		$\leq 0.9\text{mm}$	$\delta l \leq 0.38\text{mm}$ $\delta w \leq 0.40\text{mm}$
Impact resistance	EN 13329			Small ball: $\geq 12\text{N}$ Large ball: $\geq 750\text{mm}$
Density	EN 323			940kg/m ³
Resistance to staining	EN 438			5 (groups 1+2) 4 (group 3)
Resistance to cigarette burns	EN 438			4
Effect of a castor chair	EN 425		25000 cycles, no damage	appearance or damage
Effect of furniture leg	EN 424		No visible damage	No visible damage
Fire resistance	EN 14041			Bfl-s1
Dynamic coefficient of friction	EN 14041		Dynamim coefficient of friction of ≥ 0.30 when tested and shall be declared as technical class DS	DS
CE certification	EN 14041		Refer to standard below	Pass
VOC	FloorScore			Pass